**Ecodora Srl**
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

# P/N 0E2B3/16117NH52

Diaphragm pump in aluminum and polypropylene series APPB-12 with multi ported inlet/outlet, membranes in NBR, balls in Hytrel®, seats in AISI 316 stainless steel and polypropylene and ball valves with spring

## SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

## FEATURES

| | |
|---|---|
| Ratio | 1:1 |
| Flow rate | 60 l/min |
| Compatible fluids | water, mineral-vegetable oils, diesel fuel |
| Motor and inside flanges material | aluminum |
| Wetted parts | polypropylene |
| Ball valve material | Hytrel® |
| Air inlet connection | G 3/8" (f) |
| Fluid inlet-outlet connection | G 3/4" (f) x G 1/2" (f) |
| Air working pressure | 2÷6 bar |
| Max supply pressure | 8 bar |
| Average air consumption | 400 l/min |
| Noise level | 75 dB |
| Fluid temperature | -10÷+65 °C |
| Max solids diameter | ø 1,5 mm |



## OVERALL DIMENSIONS (mm)

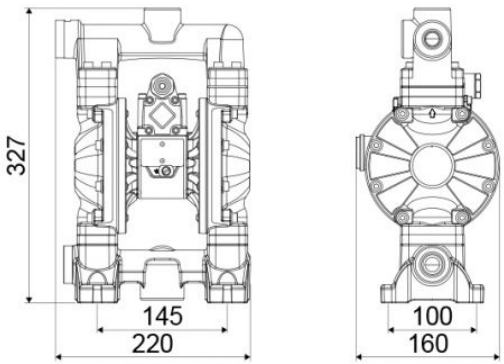

| | |
|---|---|
| Suction-delivery ball valve with spring | cylindrical ball valve with spring |
| Packing | No. 1 - 0,015 m³ |
| Weight | 7,5 kg |