Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 0E2B8/16117EA5

Diaphragm pump in aluminum and polypropylene series APPB-12 with dual inlet/multi ported outlet, membranes in EPDM, balls in acetal and seats in AISI 316 stainless steel and polypropylene

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Lube trucks and transports

FEATURES

Ratio	1:1
Flow rate	60 l/min
Max pressure	8 bar
Max cicles per minute	330 cpm
Delivery per cicles	0,188 l
Max suction lift	dry column 4,5 m - wet column 7,5 m
Max size pumpable solids	1,5 mm
Max working temperature	65 °C
Noise level	75 dB
Max air consumption	0,5 m³/min
Air working pressure	2÷6 bar
Air inlet connection	G 3/8" (f)
Air outlet connection (muffler)	G 1/2" (f)
Fluid inlet connection	dual inlet G 3/4" (f)
Fluid outlet connection	G 1/2" (f)
Balls for inlet	cylindrical ball valve



OVERALL DIMENSIONS (mm)

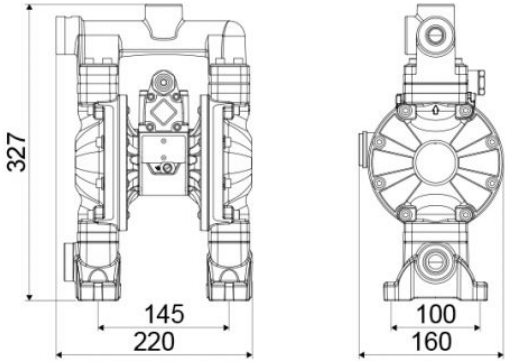

Membranes	EPDM
Balls	acetal
Seats	polypropylene and AISI 316 stainless steel
Packing	No. 1 - 0,020 m³
Gross weight	5,7 kg