
Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 0E33/2711NHHV2

Diaphragm pump in aluminum series AB-1-9 with multiple outlet, membranes in NBR, balls and seats in Hytrel®

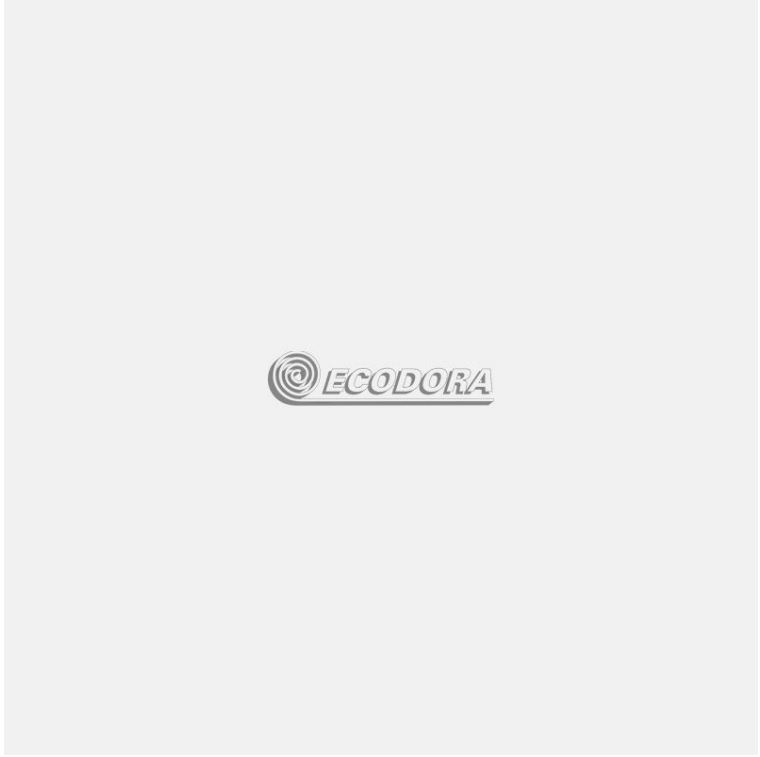

SECTORS OF USE

Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Ratio	1:1
Flow rate	170 l/min
Compatible fluids	water, mineral-vegetable oils, diesel fuel
Pump material	aluminum
Ball valve material	Hytrel®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	G 1.1/4" (f) x G 1" (f) multi-ported outlet
Air working pressure	2÷6 bar
Max supply pressure	8 bar
Average air consumption	1200 l/min
Noise level	75 dB
Fluid temperature	-10÷+90 °C
Max solids diameter	ø 3 mm
Suitable for drums or tank	-
Suction-delivery ball valve with spring	ball valve with spring

Packing	No. 1 - 0,025 m³
Weight	14 kg