

P/N 0E64200-S

Wall mounted grease kit for 180÷220 kg drums with internal \varnothing 550÷600 mm, pump R 50:1 and hose reel p/n 430/51/SO

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Ratio	50:1
Flow rate	1500 g/min
Compatible fluids	greases medium/high viscosity
Suction tube upper body	aluminum
Suction tube	carbon steel
Air inlet connection	G 1/4" (f)
Fluid outlet connection	G 3/8" (f)
Air working pressure	6÷8 bar
Average air consumption	330 l/min
Noise level	81 dB
Air max pressure	8 bar
Suitable for drums	180÷220 kg
Pump	p/n 0E62095
Hose reel	p/n 430/51/SO
Gun	p/n 0E66889
Drum cover	p/n 0E65600
Follower plate	p/n 0E66590



OVERALL DIMENSIONS (mm)

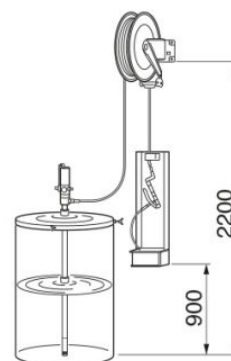

Grease connection hose	p/n 957/2
Nipple	p/n 0E38073
Drip-tray	p/n 0E88630
Packing	No. 4 - 0,150 m ³
Weight	66,8 kg