Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 0E2210F24F

Cable reel s. 280, without transformer. Number of conductors 2, cable type 2 x 1 - H05 RN-F, cable length 14 + 1 (m). Equipped with both fluorescent lights 11W and supply voltage 24 V DC. Rewinding clutch as standard




SECTORS OF USE

Agriculture, Automotive, Cleaning, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Information	without transformer
Protection degree of electrical part	IP44
Environment temperature	-5÷+40 °C
Number of conductors	2
Cable type	2x1 - H05 RN-F
Cable length	14+1 m
Cable inlet	1,2 m
Inlet voltage	24 V DC
Lamp power supply voltage	24 V DC
Lamp connection	E27
Max power	11 W
Lamp protection degree	IP65
Light bulb supplied	p/n 0E728003
Rewinding clutch	yes
Lamp	p/n 0EF24
Packing	No. 1 - 0,043 m³

OVERALL DIMENSIONS (mm)

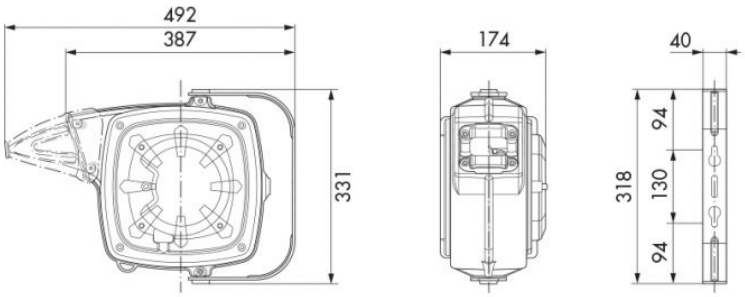

Gross weight	6,8 ÷ 8,8 kg