Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 0E2210LF

Cable reel s. 280, without transformer. Number of conductors 2, cable type 2 x 1 - H05 RN-F, cable length 14 + 1 (m). Equipped with led light s. L1224 and supply voltage from 12 V to 24 V AC/DC. Rewinding clutch as standard

SECTORS OF USE


Agriculture, Automotive, Cleaning, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Information	without transformer
Protection degree of electrical part	IP44
Environment temperature	-5÷+40 °C
Number of conductors	2
Cable type	2x1 - H05 RN-F
Cable length	14+1 m
Cable inlet	1,2 m
Inlet voltage	12÷24 V AC/DC
Lamp power supply voltage	12÷24 V AC/DC
Lamp connection	-
Max power	3,6 W
Lamp protection degree	IP65
Light bulb supplied	p/n 0E728005
Rewinding clutch	yes
Lamp	p/n 0EL1224
Packing	No. 1 - 0,043 m³



OVERALL DIMENSIONS (mm)

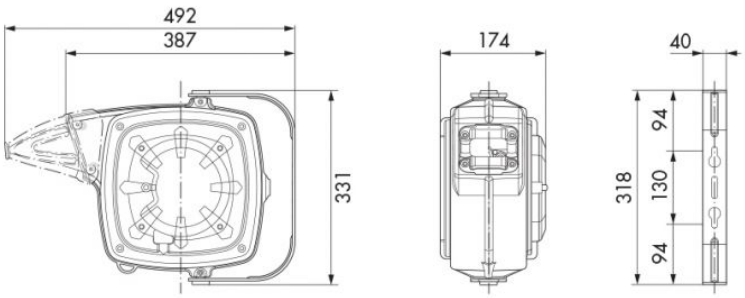

Gross weight	6,8 ÷ 8,8 kg