

P/N 74300/30

Manual hose reel s. 430, for hot water, 200 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

SECTORS OF USE


Agriculture, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

| | |
|-------------------|--|
| Pressure | 200 bar |
| Compatible fluids | water max 130 °C |
| Swivel joint | AISI 304 stainless steel |
| Seals | Viton® |
| Characteristic | manual |
| Material | painted steel |
| Couplings | - |
| Hose | - |
| ø e hose length | - |
| Inlet | G 3/8" (f) |
| Outlet | G 1/2" (f) |
| Reel flow path | AISI 304 stainless steel - zinc plated steel |



OVERALL DIMENSIONS (mm)

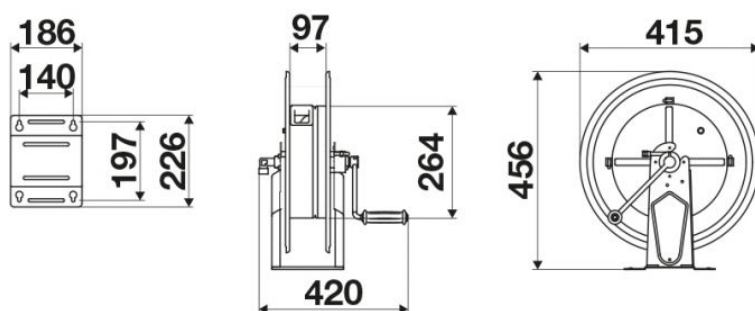

FURTHER FEATURES

| Capacity 1/4" | Capacity 5/16" | Capacity 3/8" | Capacity 1/2" | Capacity 5/8" | Capacity 3/4" |
|---------------|----------------|---------------|---------------|---------------|---------------|
| 50 m | 35 m | 25 m | 17 m | 15 m | 8 m |