

P/N 532E24/50

Hose reel with electric motorization 24 V DC in AISI 304 stainless steel, s. 530 for grease, 600 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

SECTORS OF USE


Industry

FEATURES

Pressure	600 bar
Compatible fluids	grease
Swivel joint	zinc plated steel
Seals	polyurethane
Characteristic	electric 24 V DC
Material	AISI 304 stainless steel
Couplings	-
Hose	-
Ø e hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	zinc plated steel - AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

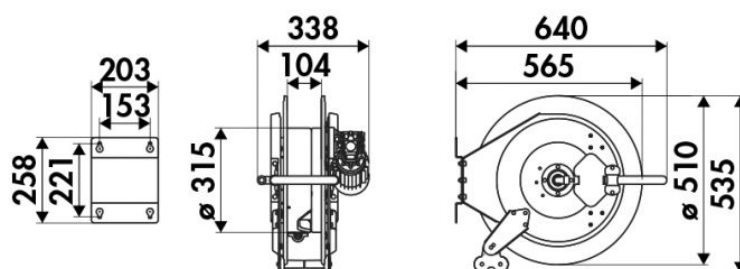

FURTHER FEATURES

Capacity 1/4"	Capacity 3/8"	Capacity 1/2"
50 m	35 m	25 m