

## P/N 534E24/35

Hose reel with electric motorization 24 V DC in AISI 304 stainless steel, s. 530 for hot water, 400 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

### SECTORS OF USE


Industry

### FEATURES

|                   |                          |
|-------------------|--------------------------|
| Pressure          | 400 bar                  |
| Compatible fluids | water max 130 °C         |
| Swivel joint      | AISI 304 stainless steel |
| Seals             | Viton® and Teflon®       |
| Characteristic    | electric 24 V DC         |
| Material          | AISI 304 stainless steel |
| Couplings         | -                        |
| Hose              | -                        |
| Ø e hose length   | -                        |
| Inlet             | G 3/8" (f)               |
| Outlet            | G 1/2" (f)               |
| Reel flow path    | AISI 304 stainless steel |



### OVERALL DIMENSIONS (mm)

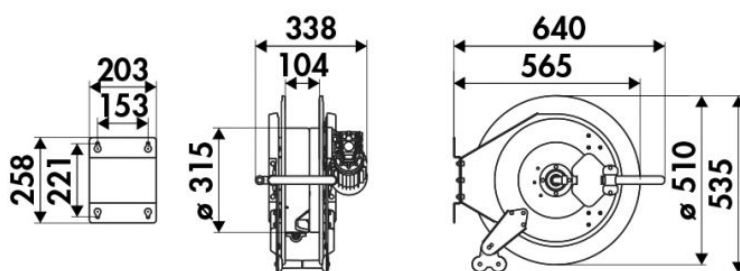

### FURTHER FEATURES

| Capacity 1/4" | Capacity 3/8" | Capacity 1/2" |
|---------------|---------------|---------------|
| 50 m          | 35 m          | 25 m          |