

P/N 542E24/50

Hose reel with electric motorization 24 V DC in AISI 304 stainless steel, s. 540 for grease, 600 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

SECTORS OF USE


Industry

FEATURES

| | |
|-------------------|--|
| Pressure | 600 bar |
| Compatible fluids | grease |
| Swivel joint | zinc plated steel |
| Seals | polyurethane |
| Characteristic | electric 24 V DC |
| Material | AISI 304 stainless steel |
| Couplings | - |
| Hose | - |
| ø e hose length | - |
| Inlet | G 3/8" (f) |
| Outlet | G 1/2" (f) |
| Reel flow path | zinc plated steel - AISI 304 stainless steel |



OVERALL DIMENSIONS (mm)

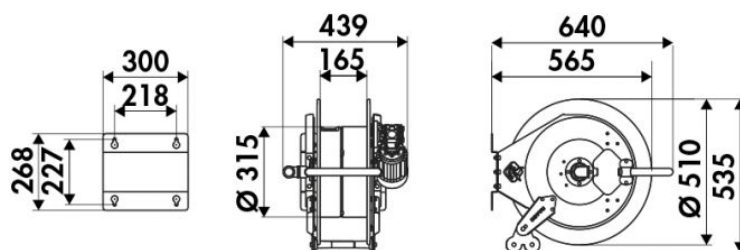

FURTHER FEATURES

| Capacity 1/4" | Capacity 3/8" | Capacity 1/2" |
|---------------|---------------|---------------|
| 90 m | 60 m | 45 m |