

## P/N 544E40/35

Hose reel with electric motorization 230/400 V AC in AISI 304 stainless steel, s. 540 for hot water, 400 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

### SECTORS OF USE


Industry

### FEATURES

|                   |                                  |
|-------------------|----------------------------------|
| Pressure          | 400 bar                          |
| Compatible fluids | water max 130 °C                 |
| Swivel joint      | AISI 304 stainless steel         |
| Seals             | Viton® and Teflon®               |
| Characteristic    | electric 230/400 V AC - 50/60 Hz |
| Material          | AISI 304 stainless steel         |
| Couplings         | -                                |
| Hose              | -                                |
| ø e hose length   | -                                |
| Inlet             | G 3/8" (f)                       |
| Outlet            | G 1/2" (f)                       |
| Reel flow path    | AISI 304 stainless steel         |



### OVERALL DIMENSIONS (mm)

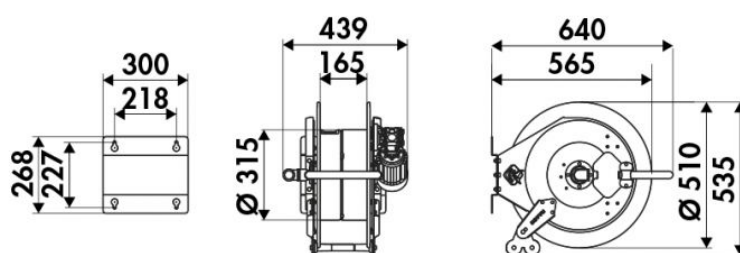

### FURTHER FEATURES

| Capacity 1/4" | Capacity 3/8" | Capacity 1/2" |
|---------------|---------------|---------------|
| 90 m          | 60 m          | 45 m          |