

## P/N 564E23/26

Hose reel with electric motorization 230 V AC in AISI 304 stainless steel, s. 560 for hot water and oil and similar, 150 bar, without hose. Inlet-outlet G 1/2" (f)

### SECTORS OF USE


Industry

### FEATURES

|                   |                                             |
|-------------------|---------------------------------------------|
| Pressure          | 150 bar                                     |
| Compatible fluids | water max 130 °C, oils and similar products |
| Swivel joint      | AISI 304 stainless steel                    |
| Seals             | Viton®                                      |
| Characteristic    | electric 230 V AC - 50/60 Hz                |
| Material          | AISI 304 stainless steel                    |
| Couplings         | -                                           |
| Hose              | -                                           |
| ø e hose length   | -                                           |
| Inlet             | G 1/2" (f)                                  |
| Outlet            | G 1/2" (f)                                  |
| Reel flow path    | AISI 304 stainless steel                    |



### OVERALL DIMENSIONS (mm)

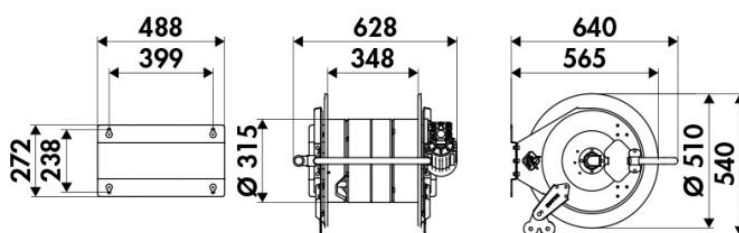

### FURTHER FEATURES

| Capacity 1/4" | Capacity 3/8" | Capacity 1/2" |
|---------------|---------------|---------------|
| 130 m         | 80 m          | 70 m          |