



P/N 0E825201/6000

Hose reel with electric motorization 24 V DC in AISI 316 stainless steel s. 700, for water, oil, diesel and industrial fluids, 70 bar, without hose. Drum width 270 mm. Inlet-outlet G 2" (f)

SECTORS OF USE


Industry, Mining, Lube trucks and transports

FEATURES

| Pressure | 70 bar |
|-------------------|--|
| Compatible fluids | water - oils - diesel fuel - industrial fluid |
| Swivel joint | AISI 316 stainless steel |
| Seals | Viton [®] |
| Characteristic | electric 24 V DC |
| Material | AISI 316 stainless steel |
| Couplings | - |
| Hose | - |
| ø e hose length | - |
| Inlet | G 2" (f) |
| Outlet | G 2" (f) |
| Reel flow path | AISI 316 stainless steel |



OVERALL DIMENSIONS (mm)

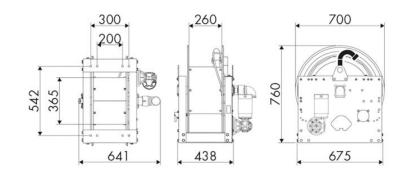

FURTHER FEATURES

| Capacity 3/8" | Capacity 1/2" | Capacity 3/4" | Capacity 1" | Capacity 1.1/4" | Capacity 1.1/2" | Capacity 2" |
|---------------|---------------|---------------|-------------|-----------------|-----------------|-------------|
| 160 m | 110 m | 65 m | 30 m | 20 m | 15 m | 10 m |