

## P/N OE845201/6000

Hose reel with electric motorization 24 V DC in AISI 316 stainless steel s. 700, for water, oil, diesel and industrial fluids, 70 bar, without hose. Drum width 410 mm. Inlet-outlet G 2" (f)

### SECTORS OF USE


Industry, Mining, Lube trucks and transports

### FEATURES

|                   |   |
|-------------------|---|
| Pressure          | 70 bar  |
| Compatible fluids | water - oils - diesel fuel - industrial fluid |
| Swivel joint      | AISI 316 stainless steel                      |
| Seals             | Viton®  |
| Characteristic    | electric 24 V DC                              |
| Material          | AISI 316 stainless steel                      |
| Couplings         | -   |
| Hose              | -   |
| ø e hose length   | -   |
| Inlet             | G 2" (f)                                      |
| Outlet            | G 2" (f)                                      |
| Reel flow path    | AISI 316 stainless steel                      |



### OVERALL DIMENSIONS (mm)

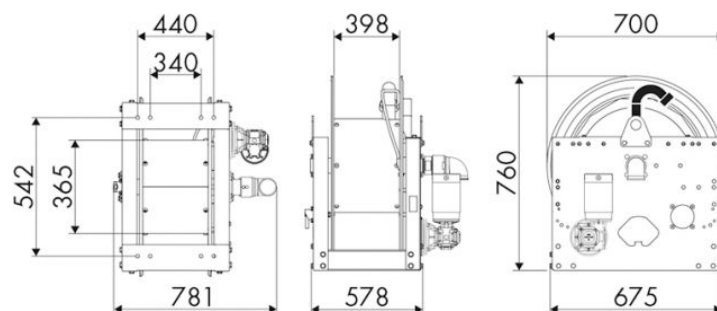

### FURTHER FEATURES

| Capacity 3/8" | Capacity 1/2" | Capacity 3/4" | Capacity 1" | Capacity 1.1/4" | Capacity 1.1/2" | Capacity 2" |
|---------------|---------------|---------------|-------------|-----------------|-----------------|-------------|
| 290 m         | 180 m         | 120 m         | 60 m        | 35 m            | 30 m            | 20 m        |