

P/N 0E875402/5000

Hose reel with electric motorization 230 V AC - 50/60 Hz in AISI 316 stainless steel, ATEX s. 700, for water, oil, diesel and industrial fluids, 100 bar, without hose. Drum width 690 mm. Inlet-outlet G 1" (f) with rewinding clutch

SECTORS OF USE


Industry, Mining, Lube trucks and transports

FEATURES

Pressure	100 bar
Compatible fluids	water - oils - diesel fuel - industrial fluid
Swivel joint	AISI 316 stainless steel
Seals	Viton®
Characteristic	electric 230 V AC - 50/60 Hz ATEX
Material	AISI 316 stainless steel
Couplings	-
Hose	-
Ø e hose length	-
Inlet	G 1" (f)
Outlet	G 1" (f)
Reel flow path	AISI 316 stainless steel



OVERALL DIMENSIONS (mm)

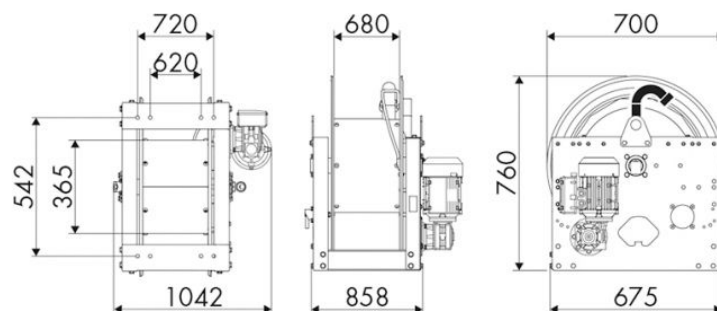

FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
550 m	350 m	244 m	134 m	84 m	75 m	43 m