

## P/N 0E821402/1000

Hose reel with electric motorization 230 V AC - 50/60 Hz in painted steel, ATEX s. 700, for air-water and diesel, 20 bar, without hose. Drum width 270 mm. Inlet-outlet G 1" (f)

### SECTORS OF USE


Industry, Mining, Lube trucks and transports

### FEATURES

Pressure	20 bar
Compatible fluids	air - water - diesel fuel
Swivel joint	brass
Seals	Viton®
Characteristic	electric 230 V AC - 50/60 Hz ATEX
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1" (f)
Outlet	G 1" (f)
Reel flow path	aluminum - zinc plated steel



### OVERALL DIMENSIONS (mm)

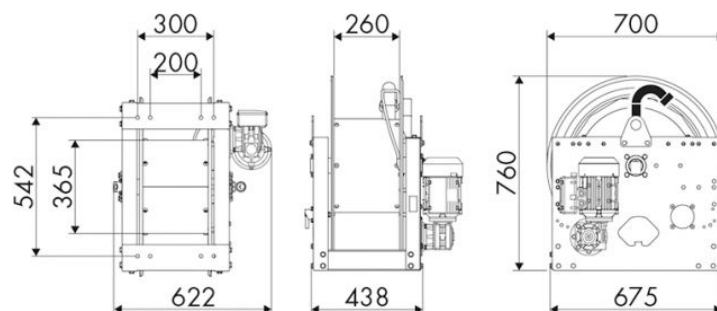

### FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
160 m	110 m	65 m	32 m	20 m	17 m	10 m