



# P/N 0E823301/6000

Hose reel with electric motorization 230 V AC - 50/60 Hz in painted steel s. 700, for air-water, 70 bar, without hose. Drum width 270 mm. Inlet-outlet G 2" (f) with reel flow path and junction in AISI 316 stainless steel

## **SECTORS OF USE**


Industry, Mining, Lube trucks and transports

#### **FEATURES**

Pressure	70 bar
Compatible fluids	air - water - diesel fuel
Swivel joint	AISI 316 stainless steel
Seals	Viton <sup>®</sup>
Characteristic	electric 230 V AC - 50/60 Hz
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 2" (f)
Outlet	G 2" (f)
Reel flow path	AISI 316 stainless steel



# **OVERALL DIMENSIONS (mm)**

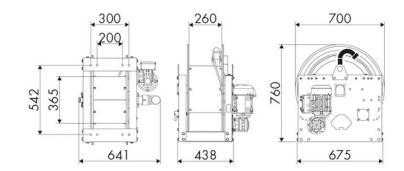

## **FURTHER FEATURES**

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
160 m	110 m	65 m	30 m	20 m	15 m	10 m