

## P/N 0E823402/6000

Hose reel with electric motorization 230 V AC - 50/60 Hz in painted steel, ATEX s. 700, for air-water and diesel, 70 bar, without hose. Drum width 270 mm. Inlet-outlet G 2" (f) with AISI 316 stainless steel reel flow path

### SECTORS OF USE


Industry, Mining, Lube trucks and transports

### FEATURES

Pressure	70 bar
Compatible fluids	air - water
Swivel joint	AISI 316 stainless steel
Seals	Viton®
Characteristic	electric 230 V AC - 50/60 Hz ATEX
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 2" (f)
Outlet	G 2" (f)
Reel flow path	AISI 316 stainless steel



### OVERALL DIMENSIONS (mm)

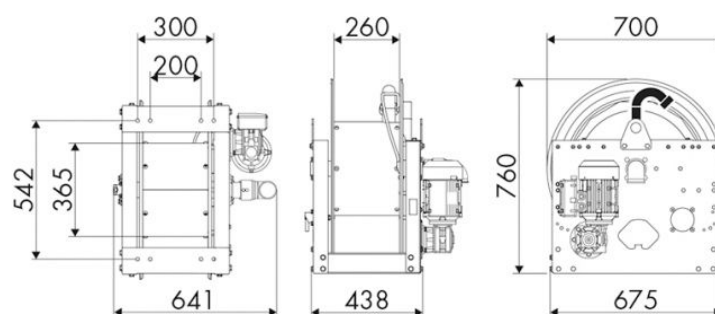

### FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
160 m	110 m	65 m	30 m	20 m	15 m	10 m