

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@ecodora.com

P/N 0E843301/5000

Hose reel with electric motorization 230 V AC - 50/60 Hz in painted steel s. 700, for oil and similar, 100 bar, without hose. Drum width 410 mm. Inlet-outlet G 1" (f) with reel flow path junction in AISI 316 stainless steel for for high flow

SECTORS OF USE


Industry, Mining, Lube trucks and transports

FEATURES

| Pressure | 100 bar | | |
|-------------------|------------------------------|--|--|
| Compatible fluids | air - water - diesel fuel | | |
| Swivel joint | AISI 316 stainless steel | | |
| Seals | Viton [®] | | |
| Characteristic | electric 230 V AC - 50/60 Hz | | |
| Material | painted steel | | |
| Couplings | - | | |
| Hose | - | | |
| ø e hose length | - | | |
| Inlet | G 1" (f) | | |
| Outlet | G 1" (f) | | |
| Reel flow path | AISI 316 stainless steel | | |



OVERALL DIMENSIONS (mm)

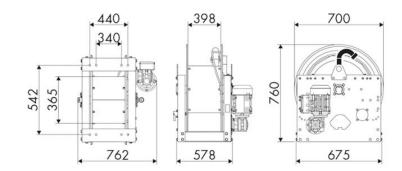

FURTHER FEATURES

| Capacity 3/8" | Capacity 1/2" | Capacity 3/4" | Capacity 1" | Capacity 1.1/4" | Capacity 1.1/2" | Capacity 2" |
|---------------|---------------|---------------|-------------|-----------------|-----------------|-------------|
| 290 m | 180 m | 120 m | 60 m | 35 m | 30 m | 20 m |