

P/N **OE843401/8000/EX**

Hose reel with electric motorization 230 V AC - 50/60 Hz in painted steel, ATEX s. 700, for JetA1, Gasoline, Kerosene, Avgas, 20 bar, without hose. Drum width 410 mm. Inlet-outlet G 2" (f) with AISI 316 stainless steel reel flow path

SECTORS OF USE


Building and road construction, Industry, Lube trucks and transports

FEATURES

Pressure	20 bar
Compatible fluids	JetA1, Gasoline, Kerosene, Avgas
Swivel joint	AISI 316 stainless steel
Seals	Viton®
Characteristic	electric 230 V AC - 50/60 Hz ATEX
Material	painted steel and AISI 316 stainless steel
Couplings	-
Hose	-
Ø e hose length	-
Inlet	G 2" (f)
Outlet	G 2" (f)
Reel flow path	AISI 316 stainless steel



OVERALL DIMENSIONS (mm)

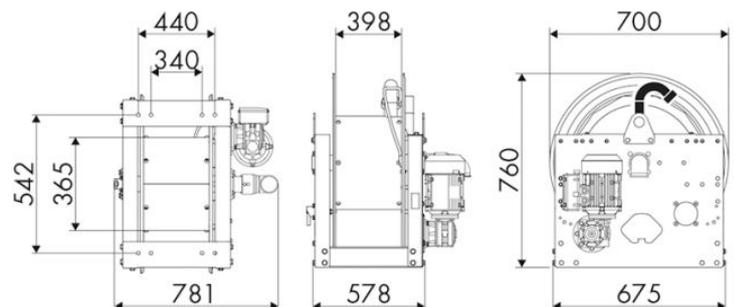

FURTHER FEATURES

Capacity 3/8" Capacity 1/2" Capacity 3/4" Capacity 1" Capacity 1.1/4" Capacity 1.1/2" Capacity 2"

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
290 m	180 m	120 m	60 m	35 m	30 m	20 m