info@ecodora.com







# P/N 0E851501/2000

Hose reel with electric motorization 400 V AC - 50/60 Hz in painted steel s. 700, for air-water and diesel, 20 bar, without hose. Drum width 550 mm. Inlet-outlet G 2" (f)

## **SECTORS OF USE**


Industry, Mining, Lube trucks and transports

#### **FEATURES**

Pressure	20 bar
Compatible fluids	air - water - diesel fuel
Swivel joint	aluminum
Seals	Viton <sup>®</sup>
Characteristic	electric 400 V AC - 50/60 Hz
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 2" (f)
Outlet	G 2" (f)
Reel flow path	aluminum - zinc plated steel



# **OVERALL DIMENSIONS (mm)**

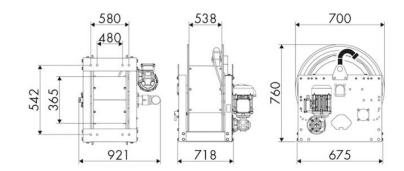

### **FURTHER FEATURES**

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
420 m	280 m	180 m	100 m	60 m	54 m	30 m