

P/N 0E853402/6000

Hose reel with electric motorization 230 V AC - 50/60 Hz in painted steel, ATEX s. 700, for oil and similar, 70 bar, without hose. Drum width 550 mm. Inlet-outlet G 2" (f) with reel flow path junction in AISI 316 stainless steel for for high flow and wit...

SECTORS OF USE


Industry, Mining, Lube trucks and transports

FEATURES

Pressure	70 bar
Compatible fluids	air - water
Swivel joint	AISI 316 stainless steel
Seals	Viton®
Characteristic	electric 230 V AC - 50/60 Hz ATEX
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 2" (f)
Outlet	G 2" (f)
Reel flow path	AISI 316 stainless steel



OVERALL DIMENSIONS (mm)

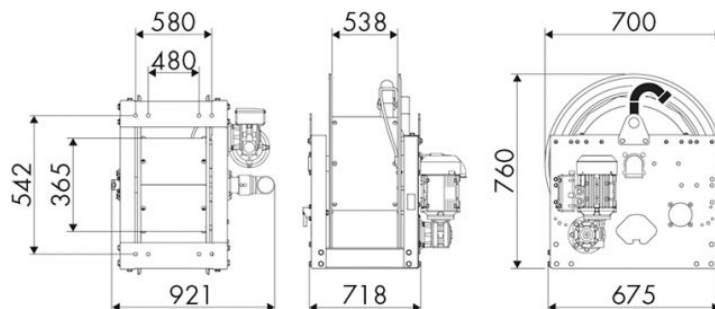

FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
420 m	280 m	180 m	100 m	60 m	50 m	30 m