



P/N 0E871501/2000

Hose reel with electric motorization 400 V AC - 50/60 Hz in painted steel s. 700, for air-water and diesel, 20 bar, without hose. Drum width 690 mm. Inlet-outlet G 2" (f)

SECTORS OF USE


Industry, Mining, Lube trucks and transports

FEATURES

Pressure	20 bar			
Compatible fluids	air - water - diesel fuel			
Swivel joint	aluminum			
Seals	Viton [®]			
Characteristic	electric 400 V AC - 50/60 Hz			
Material	painted steel			
Couplings	-			
Hose	-			
ø e hose length	-			
Inlet	G 2" (f)			
Outlet	G 2" (f)			
Reel flow path	aluminum - zinc plated steel			



OVERALL DIMENSIONS (mm)

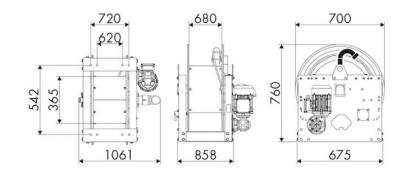

FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 3/4"	Capacity 1"	Capacity 1.1/4"	Capacity 1.1/2"	Capacity 2"
550 m	350 m	244 m	134 m	84 m	75 m	43 m