

## P/N 530E24/20

Hose reel with electric motorization 24 V DC in painted steel, s. 530 for hot water, 150 bar, without hose. Inlet-outlet G 1/2" (f)

### SECTORS OF USE


Industry

### FEATURES

|                   |                                              |
|-------------------|----------------------------------------------|
| Pressure          | 150 bar                                      |
| Compatible fluids | water max 130 °C                             |
| Swivel joint      | AISI 304 stainless steel                     |
| Seals             | Viton®                                       |
| Characteristic    | electric 24 V DC                             |
| Material          | painted steel                                |
| Couplings         | -                                            |
| Hose              | -                                            |
| ø e hose length   | -                                            |
| Inlet             | G 1/2" (f)                                   |
| Outlet            | G 1/2" (f)                                   |
| Reel flow path    | AISI 304 stainless steel - zinc plated steel |



### OVERALL DIMENSIONS (mm)

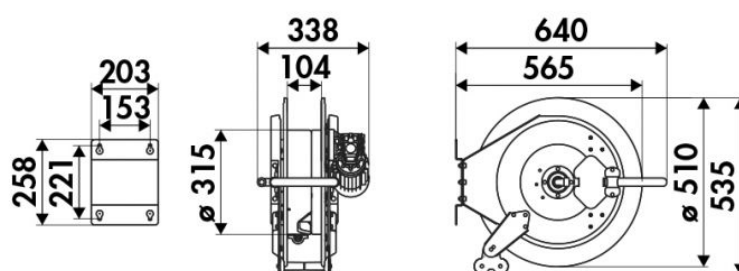

### FURTHER FEATURES

| Capacity 1/4" | Capacity 3/8" | Capacity 1/2" |
|---------------|---------------|---------------|
| 50 m          | 35 m          | 25 m          |