

## P/N 530E24/35

Hose reel with electric motorization 24 V DC in painted steel, s. 530 for hot water, 400 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)

### SECTORS OF USE


Industry

### FEATURES

Pressure	400 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton® and Teflon®
Characteristic	electric 24 V DC
Material	painted steel
Couplings	-
Hose	-
Ø e hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



### OVERALL DIMENSIONS (mm)

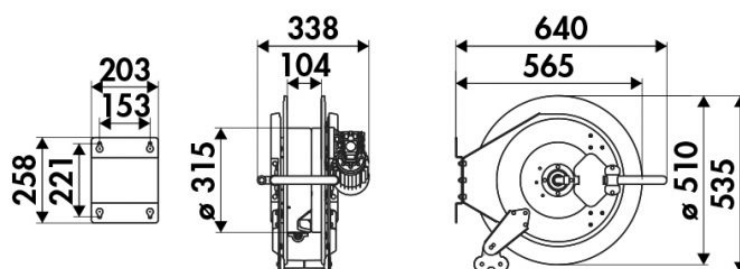

### FURTHER FEATURES

Capacity 1/4"	Capacity 3/8"	Capacity 1/2"
50 m	35 m	25 m