

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@ecodora.com

# P/N 560E12/26

Hose reel with electric motorization 12 V DC in painted steel, s. 560 for hot water, 150 bar, without hose. Inletoutlet G 1/2" (f)

### **SECTORS OF USE**


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

### **FEATURES**

Pressure	150 bar	
Compatible fluids	water max 130 °C	
Swivel joint	AISI 304 stainless steel	
Seals	Viton <sup>®</sup>	
Characteristic	electric 12 V DC	
Material	painted steel	
Couplings	-	
Hose	-	
ø e hose length	-	
Inlet	G 1/2" (f)	
Outlet	G 1/2" (f)	
Reel flow path	AISI 304 stainless steel - zinc plated steel	



## **OVERALL DIMENSIONS (mm)**

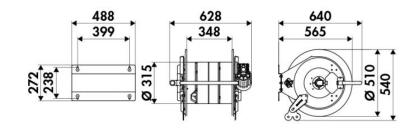

### **FURTHER FEATURES**

Capacity 1/4"	Capacity 3/8"	Capacity 1/2"
180 m	120 m	90 m