

## P/N 637/300/12

Hose reel with hydraulic motorisation s. 637 for hot water, 200 bar, without hose. Inlet G 1/2" (f), outlet G 1" (f)

### SECTORS OF USE


Industry, Mining, Lube trucks and transports

### FEATURES

Pressure	200 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	hydraulic
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



### OVERALL DIMENSIONS (mm)

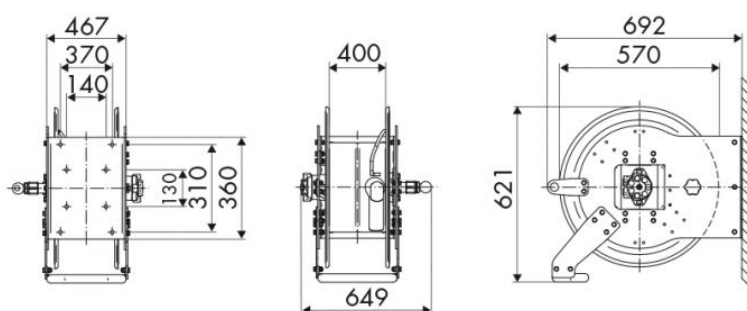

### FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 5/8"	Capacity 3/4"	Capacity 1"
200 m	150 m	110 m	75 m	50 m