

## P/N 4430/20/INOX



Fixed hose reel in ABS and brackets in painted steel s. 430, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f) and AISI 304 stainless steel reel flow path

### SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

### FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
Ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



### OVERALL DIMENSIONS (mm)

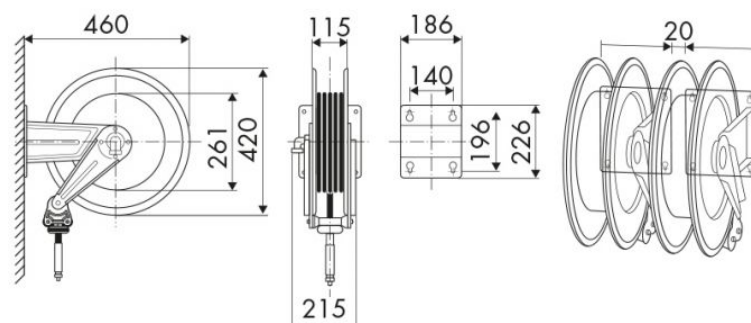

### FURTHER FEATURES

Capacity 5/16"	Capacity 3/8"	Capacity 1/2"
20 m	20 m	16 m