

P/N 4430/20/INOX



Fixed hose reel in ABS and brackets in painted steel s. 430, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f) and AISI 304 stainless steel reel flow path

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

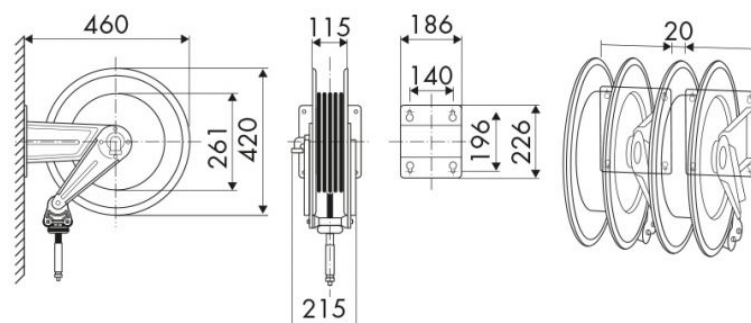

FURTHER FEATURES

Capacity 5/16"	Capacity 3/8"	Capacity 1/2"
20 m	20 m	16 m