

## P/N 4430/60



Fixed hose reel in ABS and brackets in painted steel s. 430, for diesel, 20 bar, without hose (for hose 3/4"). Connection 1/2"

### SECTORS OF USE


Agriculture, Building and road construction, Industry, Mining, Lube trucks and transports

### FEATURES

|                   |                             |
|-------------------|-----------------------------|
| Pressure          | 20 bar                      |
| Compatible fluids | diesel fuel                 |
| Swivel joint      | brass                       |
| Seals             | Viton®                      |
| Characteristic    | fixed                       |
| Material          | painted steel with ABS drum |
| Couplings         | -                           |
| Hose              | -                           |
| ø e hose length   | -                           |
| Inlet             | G 1/2" (f)                  |
| Outlet            | G 1/2" (m)                  |
| Reel flow path    | brass - zinc plated steel   |



### OVERALL DIMENSIONS (mm)

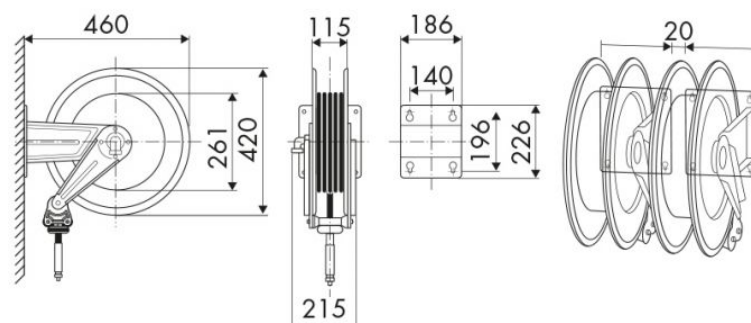

### FURTHER FEATURES

| Capacity 1/2" | Capacity 5/8" | Capacity 3/4" |
|---------------|---------------|---------------|
| 16 m          | 14 m          | 8 m           |