

P/N 4432/50



Fixed hose reel in ABS and brackets in AISI 304 stainless steel, s. 430, for grease, 600 bar, without hose. Inlet G 3/8 (f) - outlet G 1/2 (f)

SECTORS OF USE


Agriculture, Automotive, Cleaning, Building and road construction, Industry, Lube trucks and transports

FEATURES

| | |
|-------------------|--|
| Pressure | 600 bar |
| Compatible fluids | grease |
| Swivel joint | zinc plated steel |
| Seals | polyurethane |
| Characteristic | fixed |
| Material | AISI 304 stainless steel with ABS drum |
| Couplings | - |
| Hose | - |
| Ø e hose length | - |
| Inlet | G 3/8" (f) |
| Outlet | G 1/2" (f) |
| Reel flow path | zinc plated steel - AISI 304 stainless steel |



OVERALL DIMENSIONS (mm)

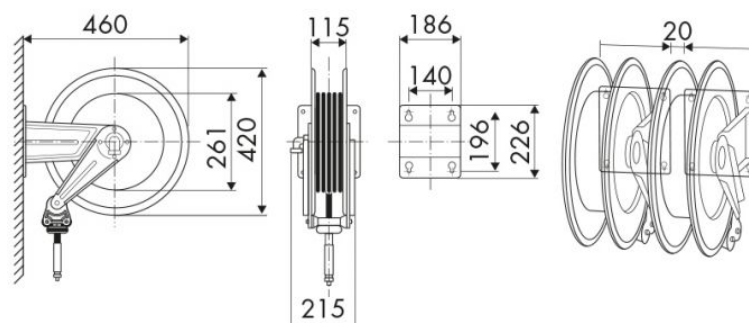

FURTHER FEATURES

| | |
|----------------|---------------|
| Capacity 5/16" | Capacity 3/8" |
| 12 m | 15 m |