

## P/N 4434/20



Fixed hose reel in ABS and brackets in AISI 304 stainless steel, s. 430, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f)

### SECTORS OF USE


Agriculture, Automotive, Cleaning, Building and road construction, Industry, Lube trucks and transports

### FEATURES

|                   |                                             |
|-------------------|---------------------------------------------|
| Pressure          | 100 bar                                     |
| Compatible fluids | water max 130 °C, oils and similar products |
| Swivel joint      | AISI 304 stainless steel                    |
| Seals             | Viton®                                      |
| Characteristic    | fixed                                       |
| Material          | AISI 304 stainless steel with ABS drum      |
| Couplings         | -                                           |
| Hose              | -                                           |
| Ø e hose length   | -                                           |
| Inlet             | G 1/2" (f)                                  |
| Outlet            | G 1/2" (f)                                  |
| Reel flow path    | AISI 304 stainless steel                    |



### OVERALL DIMENSIONS (mm)

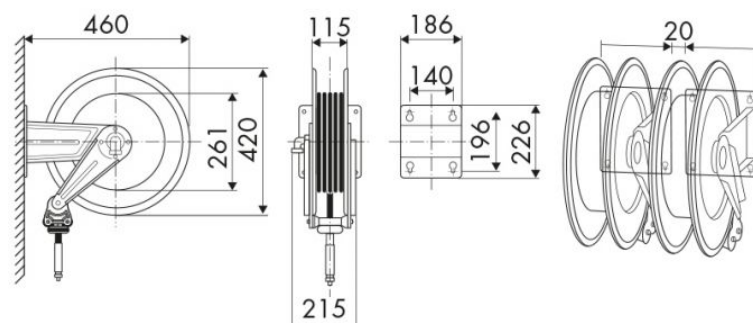

### FURTHER FEATURES

| Capacity 5/16" | Capacity 3/8" | Capacity 1/2" |
|----------------|---------------|---------------|
| 20 m           | 20 m          | 16 m          |