

P/N 4456/10



Enclosed fixed hose reel in ABS with brackets in painted steel, s. 430, for air-water-antifreeze, 20 bar, without hose, inlet-outlet G 1/2" (f). Cental pin in AISI 304 stainless steel

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Pressure	20 bar
Compatible fluids	air-water-antifreeze
Swivel joint	brass
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	brass and AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

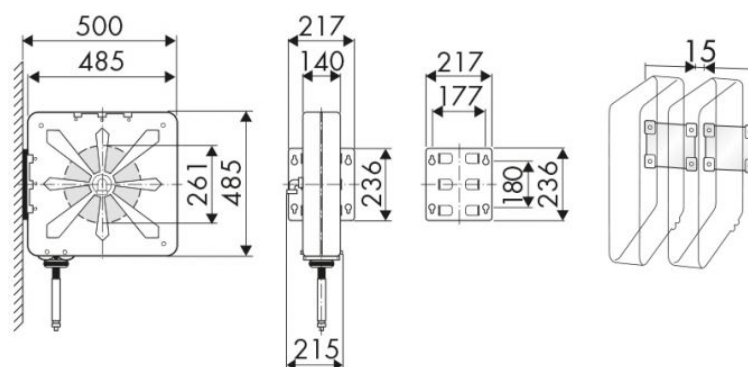

FURTHER FEATURES

Capacity 5/16"	Capacity 3/8"	Capacity 1/2"	Capacity 5/8"
20 m	20 m	15 m	14 m