

P/N 4456/35



Enclosed fixed hose reel in ABS with brackets in painted steel, s. 430, for water max 130 °C, 400 bar, without hose, inlet-outlet G 1/2" (f). Flow path in AISI 304 stainless steel

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Pressure	400 bar
Compatible fluids	water max 130 °C and AdBlue®
Swivel joint	AISI 304 stainless steel
Seals	Viton® and Teflon®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

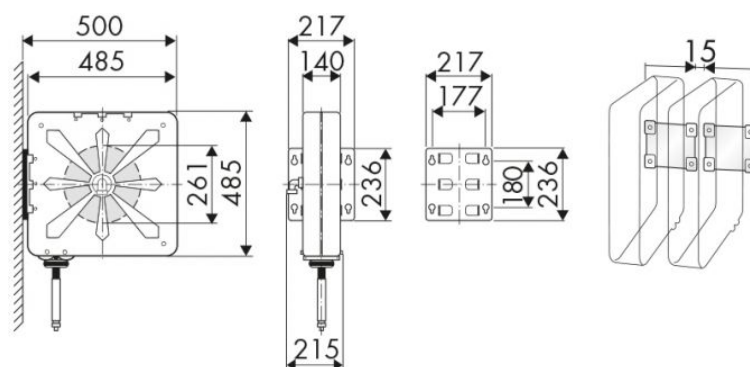

FURTHER FEATURES

Capacity 5/16"	Capacity 3/8"	Capacity 1/2"	Capacity 5/8"
20 m	20 m	15 m	14 m