

P/N 4530/30



Fixed hose reel in ABS and brackets in painted steel, s. 530, for hot water, 200 bar, without hose. Inlet G 3/8" (f) - outlet G 1/2" (f)

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

FEATURES

Pressure	200 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel with ABS drum
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 3/8" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

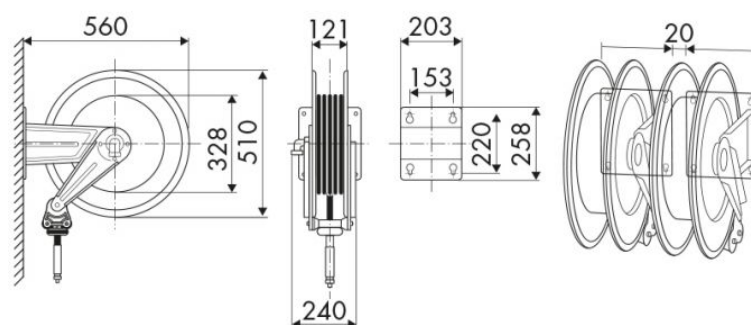

FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 5/8"
25 m	25 m	22 m