

P/N 4534/12



Fixed hose reel in ABS and brackets in AISI 304 stainless steel, s. 530, for hot water, 10 bar, with atoxic hygienic hose 25 m, \varnothing 1/2"

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

FEATURES

Pressure	10 bar
Compatible fluids	water max 130 °C, oils and similar products
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	AISI 304 stainless steel with ABS drum
Couplings	AISI 316 stainless steel
Hose	p/n 861/25
\varnothing e hose length	\varnothing 1/2" - 25 m
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel



OVERALL DIMENSIONS (mm)

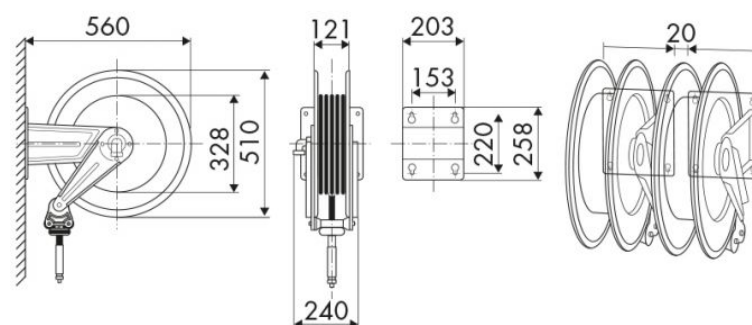

FURTHER FEATURES

Capacity 3/8"	Capacity 1/2"	Capacity 5/8"
25 m	25 m	22 m