

P/N 300/20



Fixed hose reel s. 300, for hot water, 100 bar, without hose. Inlet-outlet G 3/8" (f) - G 1/2" (f)

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	fixed
Material	painted steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 3/8" (f) - G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



OVERALL DIMENSIONS (mm)

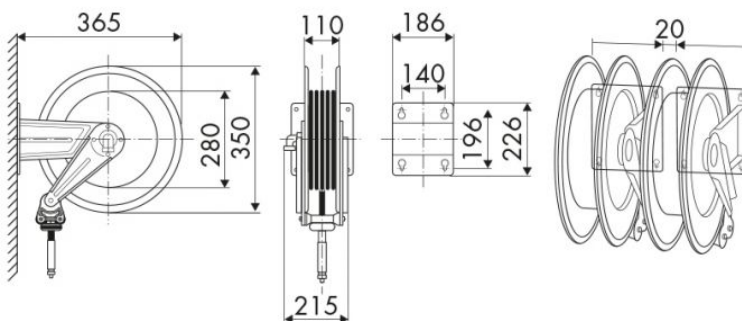

FURTHER FEATURES

Capacity 1/4"	Capacity 5/16"	Capacity 3/8"	Capacity 1/2"
12 m	12 m	12 m	8 m