

P/N 246564/30

Manual trolley mounted hose reel in AISI 304 stainless steel, s. 560, for hot water, 200 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard

SECTORS OF USE


Agriculture, Cleaning, Industry, Mining, Lube trucks and transports

FEATURES

| | |
|-------------------|--------------------------|
| Pressure | 200 bar |
| Compatible fluids | water max 130 °C |
| Swivel joint | AISI 304 stainless steel |
| Seals | Viton® |
| Characteristic | trolley mounted |
| Material | AISI 304 stainless steel |
| Couplings | - |
| Hose | - |
| Ø e hose length | - |
| Inlet | G 3/8" (f) |
| Outlet | G 1/2" (f) |
| Reel flow path | AISI 304 stainless steel |



OVERALL DIMENSIONS (mm)

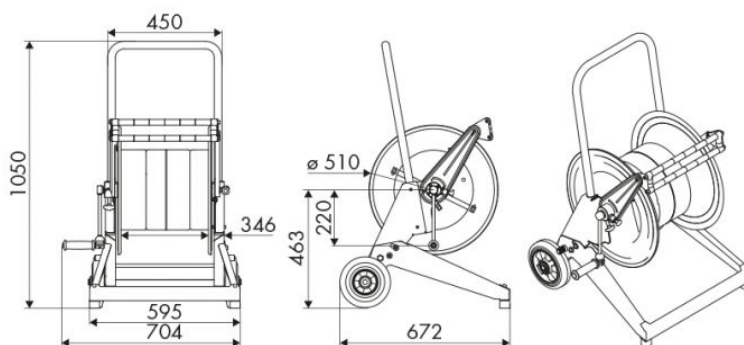

FURTHER FEATURES

| Capacity 1/4" | Capacity 5/16" | Capacity 3/8" | Capacity 1/2" |
|---------------|----------------|---------------|---------------|
| 320 m | 240 m | 140 m | 100 m |