**Ecodora Srl**
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

# P/N 259565/25

Manual trolley-mounted hose reel in AISI 316 stainless steel, s.560, for hot water, 100 bar, without hose. Inlet-outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard. With white antistatic rubber wheels and rubbers and ATEX marked




## SECTORS OF USE

Agriculture, Cleaning, Industry, Mining, Lube trucks and transports

## FEATURES

| | |
|---|---|
| Pressure | 100 bar |
| Compatible fluids | water max 130 °C |
| Swivel joint | AISI 316 stainless steel |
| Seals | Viton® |
| Characteristic | trolley mounted |
| Material | AISI 316 stainless steel |
| Couplings | - |
| Hose | - |
| ø e hose length | - |
| Inlet | G 1/2" (f) |
| Outlet | G 1/2" (f) |
| Reel flow path | AISI 316 stainless steel |

## OVERALL DIMENSIONS (mm)

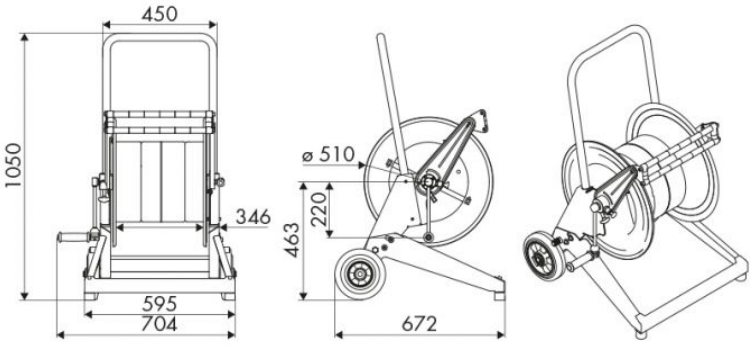


## FURTHER FEATURES

| Capacity 1/4" | Capacity 5/16" | Capacity 3/8" | Capacity 1/2" | Capacity 5/8" | Capacity 3/4" | Capacity 1" |
|---|---|---|---|---|---|---|
| 320 m | 240 m | 140 m | 100 m | 90 m | 60 m | 30 m |