

## P/N 236530/20

Manual trolley mounted hose reel s. 530, for hot water, 100 bar without hose. Inlet G 1/2" (f), outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard

### SECTORS OF USE


Agriculture, Building and road construction, Industry, Mining, Lube trucks and transports

### FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	trolley mounted
Material	painted steel - zinc plated steel
Couplings	-
Hose	-
Ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



### OVERALL DIMENSIONS (mm)

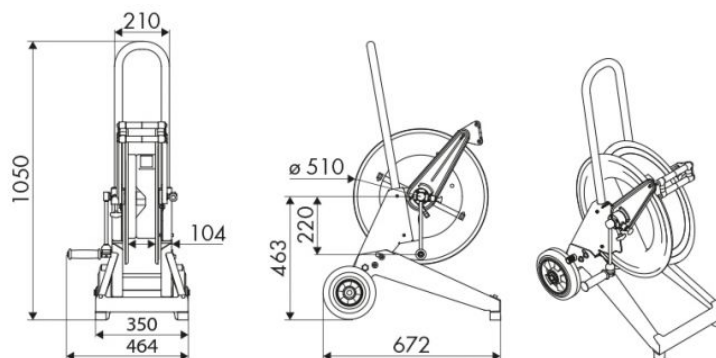

### FURTHER FEATURES

Capacity 1/4"	Capacity 5/16"	Capacity 3/8"	Capacity 1/2"	Capacity 5/8"	Capacity 3/4"	Capacity 1"
90 m	65 m	35 m	25 m	20 m	15 m	7 m