

## P/N 236540/25

Manual trolley mounted hose reel s. 540, for hot water, 100 bar without hose. Inlet-outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard

### SECTORS OF USE


Agriculture, Building and road construction, Industry, Mining, Lube trucks and transports

### FEATURES

|                   |  |
|-------------------|--|
| Pressure          | 100 bar                                      |
| Compatible fluids | water max 130 °C                             |
| Swivel joint      | AISI 304 stainless steel                     |
| Seals             | Viton®                                       |
| Characteristic    | trolley mounted                              |
| Material          | painted steel - zinc plated steel            |
| Couplings         | -  |
| Hose              | -  |
| ø e hose length   | -  |
| Inlet             | G 1/2" (f)                                   |
| Outlet            | G 1/2" (f)                                   |
| Reel flow path    | AISI 304 stainless steel - zinc plated steel |



### OVERALL DIMENSIONS (mm)

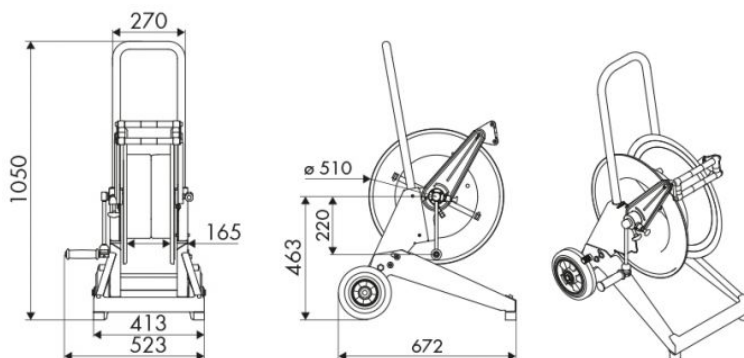

### FURTHER FEATURES

| Capacity 1/4" | Capacity 5/16" | Capacity 3/8" | Capacity 1/2" | Capacity 5/8" | Capacity 3/4" | Capacity 1" |
|---------------|----------------|---------------|---------------|---------------|---------------|-------------|
| 150 m         | 110 m          | 65 m          | 45 m          | 35 m          | 25 m          | 15 m        |