Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 236560/25

Manual trolley mounted hose reel s. 560, for hot water, 100 bar without hose. Inlet-outlet G 1/2" (f). Hose guide, safety system and rotation lock as standard




SECTORS OF USE

Agriculture, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton®
Characteristic	trolley mounted
Material	painted steel - zinc plated steel
Couplings	-
Hose	-
ø e hose length	-
Inlet	G 1/2" (f)
Outlet	G 1/2" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel

OVERALL DIMENSIONS (mm)

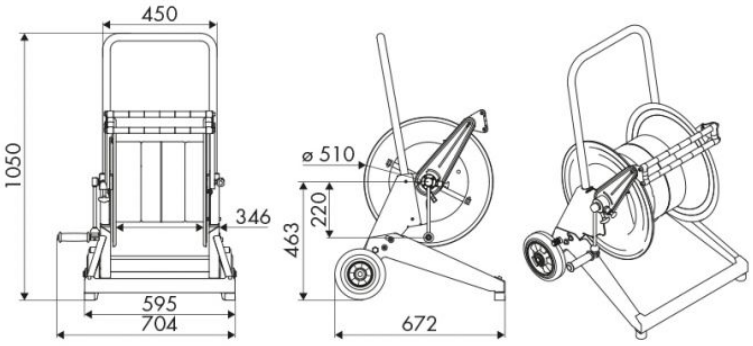

FURTHER FEATURES

Capacity 1/4"	Capacity 5/16"	Capacity 3/8"	Capacity 1/2"	Capacity 5/8"	Capacity 3/4"	Capacity 1"
320 m	240 m	140 m	100 m	90 m	60 m	30 m