

## P/N 0E2A1/26775TTI

Diaphragm pump in polypropylene and AISI 316 stainless steel series PPIB-1, membranes in Teflon® and Hytrel®, balls in Teflon® and seats in AISI 316 stainless steel

### SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

### FEATURES

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Ratio                           | 1:1                               |
| Flow rate                       | 130 l/min                         |
| Max pressure                    | 8 bar                             |
| Max cycles per minute           | 270 cpm                           |
| Delivery per cycles             | 0,540 l                           |
| Max suction lift                | dry column 5 m - wet column 7,5 m |
| Max size pumpable solids        | 3 mm                              |
| Max working temperature         | 65 °C                             |
| Noise level                     | 78 dB                             |
| Max air consumption             | 1,1 m³/min                        |
| Air working pressure            | 3÷8 bar                           |
| Air inlet connection            | G 3/8" (f)                        |
| Air outlet connection (muffler) | G 3/4" (f)                        |
| Fluid inlet connection          | G 1.1/4" (f)                      |
| Fluid outlet connection         | G 1" (f)                          |



### OVERALL DIMENSIONS (mm)

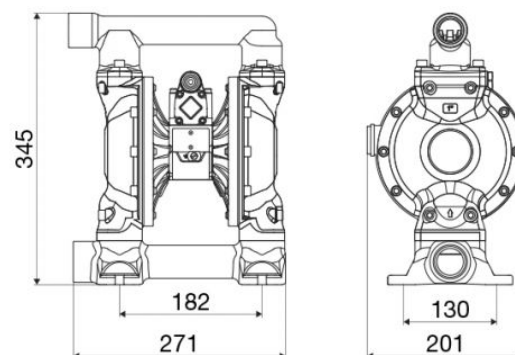

|                 |                          |
|-----------------|--------------------------|
| Balls for inlet | ball valve               |
| Membranes       | Teflon®+Hytrel®          |
| Balls           | Teflon®                  |
| Seats           | AISI 316 stainless steel |
| Packing         | No. 1 - 0,030 m³         |
| Gross weight    | 24 kg                    |