Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 0E2B3/16117TT5

Diaphragm pump in aluminum and polypropylene series APPB-12 with multi ported inlet/outlet, membranes and balls in Teflon® and seats in AISI 316 stainless steel and polypropylene

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Lube trucks and transports

FEATURES

Ratio	1:1
Flow rate	60 l/min
Max pressure	8 bar
Max cicles per minute	350 cpm
Delivery per cicles	0,188 l
Max suction lift	dry column 4,5 m - wet column 7,5 m
Max size pumpable solids	1,5 mm
Max working temperature	65 °C
Noise level	75 dB
Max air consumption	0,5 m³/min
Air working pressure	2÷6 bar
Air inlet connection	G 3/8" (f)
Air outlet connection (muffler)	G 1/2" (f)
Fluid inlet connection	G 3/4" (f) (G 1" (f) for drum)
Fluid outlet connection	G 1/2" (f)



OVERALL DIMENSIONS (mm)

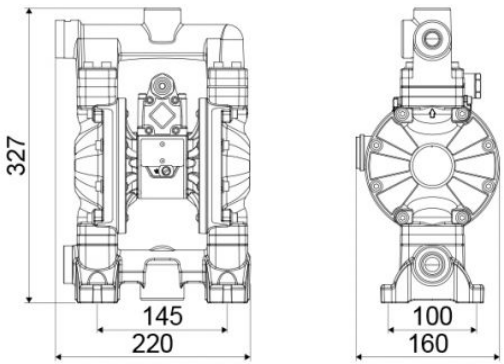

Balls for inlet	cylindrical ball valve
Membranes	Teflon®+Hytrel®
Balls	Teflon®
Seats	polypropylene and AISI 316 stainless steel
Packing	No. 1 - 0,020 m³
Gross weight	5,8 kg