Ecodora Srl
Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891 / +39 0424 571230
info@ecodora.com

P/N 0E2B8/16117NH52

Diaphragm pump in aluminum and polypropylene series APPB-12 with dual inlet/multi ported outlet, membranes in NBR, balls in Hytrel®, seats in AISI 316 stainless steel and polypropylene and ball valves with spring

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Lube trucks and transports

FEATURES

Ratio	1:1
Flow rate	60 l/min
Compatible fluids	water, mineral-vegetable oils, diesel fuel
Motor and inside flanges material	aluminum
Wetted parts	polypropylene
Ball valve material	Hytrel®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	dual inlet/multi-ported outlet G 3/4" (f) x G 1/2" (f)
Air working pressure	2÷6 bar
Max supply pressure	8 bar
Average air consumption	400 l/min
Noise level	75 dB
Fluid temperature	-10÷+65 °C
Max solids diameter	ø 1,5 mm



OVERALL DIMENSIONS (mm)

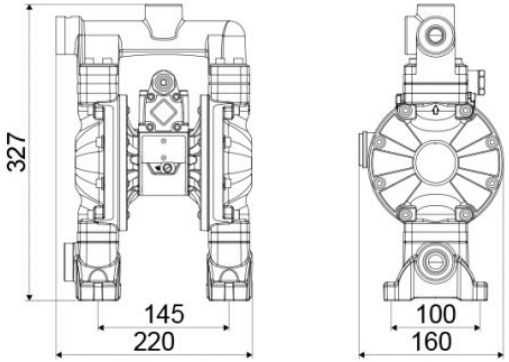

Suction-delivery ball valve with spring	cylindrical ball valve with spring
Packing	No. 1 - 0,015 m^3
Weight	7 kg