

## P/N 0E3C3/26111EAA



Diaphragm pump in aluminum series AAB-1-9 with multi ported inlet/outlet, membranes in EPDM, balls and seats in acetal

### SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

### FEATURES

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Ratio                           | 1:1                               |
| Flow rate                       | 170 l/min                         |
| Max pressure                    | 8 bar                             |
| Max cycles per minute           | 300 cpm                           |
| Delivery per cycles             | 0,590 l                           |
| Max suction lift                | dry column 5 m - wet column 7,5 m |
| Max size pumpable solids        | 3 mm                              |
| Max working temperature         | 100 °C                            |
| Noise level                     | 75 dB                             |
| Max air consumption             | 1,40 m <sup>3</sup> /min          |
| Air working pressure            | 2÷6 bar                           |
| Air inlet connection            | G 3/8" (f)                        |
| Air outlet connection (muffler) | G 1/2" (f)                        |
| Fluid inlet connection          | 4xG 1" (f)                        |
| Fluid outlet connection         | 5xG 1" (f)                        |
| Balls for inlet                 | ball valve                        |
| Membranes                       | EPDM                              |



### OVERALL DIMENSIONS (mm)

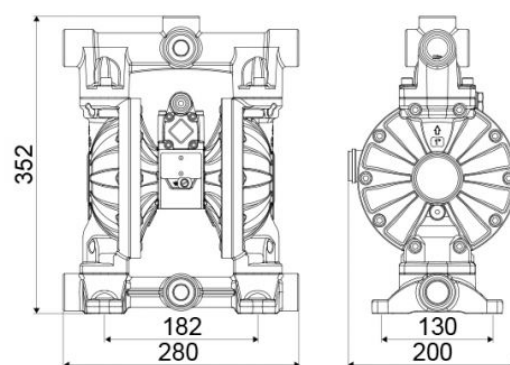

|              |                  |
|--------------|------------------|
| Balls        | acetal           |
| Seats        | acetal           |
| Packing      | No. 1 - 0,030 m³ |
| Gross weight | 13 kg            |