

P/N 0E3C3/26111TTP



Diaphragm pump in aluminum series AAB-1-9 with multi ported inlet/outlet, membranes and balls in Teflon® and seats in polypropylene

SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

FEATURES

Ratio	1:1
Flow rate	150 l/min
Max pressure	8 bar
Max cycles per minute	300 cpm
Delivery per cycles	0,590 l
Max suction lift	dry column 5 m - wet column 7,5 m
Max size pumpable solids	3 mm
Max working temperature	100 °C
Noise level	75 dB
Max air consumption	1,40 m³/min
Air working pressure	2÷6 bar
Air inlet connection	G 3/8" (f)
Air outlet connection (muffler)	G 1/2" (f)
Fluid inlet connection	4xG 1" (f)
Fluid outlet connection	5xG 1" (f)



OVERALL DIMENSIONS (mm)

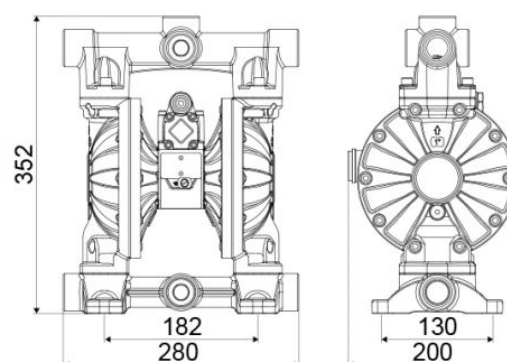

Balls for inlet	ball valve
Membranes	Teflon®+Hytrel®
Balls	Teflon®
Seats	polypropylene
Packing	No. 1 - 0,030 m³
Gross weight	13 kg