

## P/N 0E3C3/50111NHH



Diaphragm pump in aluminum series AAB-2 with multi ported inlet/outlet, membranes in NBR, balls and seats in Hytrel®

### SECTORS OF USE


Agriculture, Automotive, Building and road construction, Industry, Mining, Lube trucks and transports

### FEATURES

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Ratio                           | 1:1                               |
| Flow rate                       | 610 l/min                         |
| Max pressure                    | 8 bar                             |
| Max cycles per minute           | 147 cpm                           |
| Delivery per cycles             | 4,150 l                           |
| Max suction lift                | dry column 5 m - wet column 7,5 m |
| Max size pumpable solids        | 6,5 mm                            |
| Max working temperature         | 100 °C                            |
| Noise level                     | 82 dB                             |
| Max air consumption             | 4 m³/min                          |
| Air working pressure            | 2÷6 bar                           |
| Air inlet connection            | G 3/4" (f)                        |
| Air outlet connection (muffler) | G 1" (f)                          |
| Fluid inlet connection          | G 2.1/2" (f)                      |
| Fluid outlet connection         | G 2" (f)                          |
| Balls for inlet                 | ball valve                        |
| Membranes                       | NBR                               |



### OVERALL DIMENSIONS (mm)

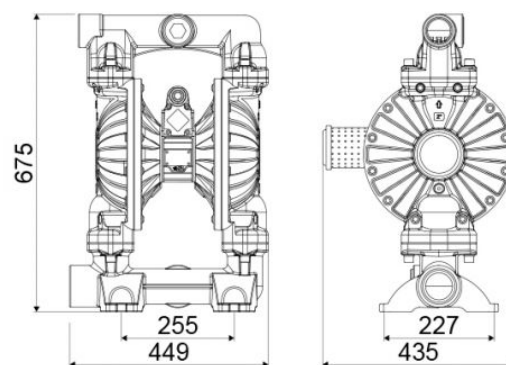

|              |                  |
|--------------|------------------|
| Balls        | Hytrel®          |
| Seats        | Hytrel®          |
| Packing      | No. 1 - 0,120 m³ |
| Gross weight | 45 kg            |