

## P/N 0E2B8/16117NH5



Diaphragm pump in aluminum and polypropylene series APPB-12 with dual inlet/multi ported outlet, membranes in NBR, balls in Hytrel® and seats in AISI 316 stainless steel and polypropylene

### SECTORS OF USE


Agriculture, Automotive, Building and road construction, Lube trucks and transports

### FEATURES

Ratio	1:1
Flow rate	60 l/min
Max pressure	8 bar
Max cycles per minute	330 cpm
Delivery per cycles	0,188 l
Max suction lift	dry column 4,5 m - wet column 7,5 m
Max size pumpable solids	1,5 mm
Max working temperature	65 °C
Noise level	75 dB
Max air consumption	0,5 m <sup>3</sup> /min
Air working pressure	2÷6 bar
Air inlet connection	G 3/8" (f)
Air outlet connection (muffler)	G 1/2" (f)
Fluid inlet connection	dual inlet G 3/4" (f)
Fluid outlet connection	G 1/2" (f)
Balls for inlet	cylindrical ball valve



### OVERALL DIMENSIONS (mm)

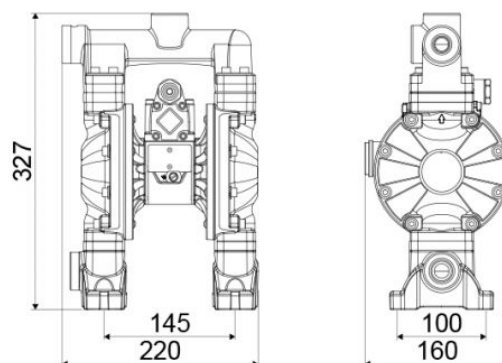

Membranes	NBR
Balls	Hytrel®
Seats	polypropylene and AISI 316 stainless steel
Packing	No. 1 - 0,020 m <sup>3</sup>
Gross weight	5,7 kg